



# GSW76x...N Ground Screw

0.0 Sheet thickness 0.0 mm

fast assembly

## Information

### Usage

Assembly of PCS70 and PCS100 base plates



### Material

Steel, hot-dip galvanized acc. to

PN-EN ISO 1461:2011

### Additional information

- longitudinal perforation enables screw assembly with PCS70 or PCS100 base plates - Installation of small and medium-sized freestanding systems without the need for using pile driver - increased bearing capacity (compaction) of the soil when screwing in the screw - hot-dip galvanized material for very high corrosion resistance For the assembly of a post with ground screw use 4 x SGKFM10x30 Screw Sets

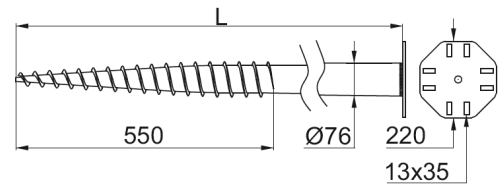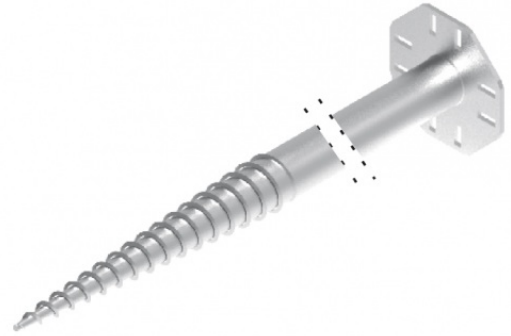

## Product versions

Symbol	Catalogue number	Length L (mm)	Weight 1 pc. (kg)	Quantity (pcs.)
GSW76x1600N	897716	1,600	11	1
GSW76x2200N	897722	2,200	12.90	1

## Examples



Montaż podstaw PCS70 do podłoża przy użyciu śrub do gruntu GSW...N

