

**SCHUKO® socket, 16 A 250 V ~, with inscription field, Safety Plus, hinged lid, with safety lock, thermoplastic lacquered, LS range, antique brass**

|                   |                            |
|-------------------|----------------------------|
| Reference number: | ME 1520 NAKLSL AT          |
| EAN/GTIN:         | 4011377158160              |
| Color:            | antique brass              |
| Material:         | thermoplastic (breakproof) |

- Individual colour printing possible
- Individual inscription of paper inlays for inscription fields possible

SCHUKO® socket, Safety Plus, with inscription field, ME1520NAKLSLAT

**with hinged lid (with spring)**

**with inscription field 9 x 39 mm**

**with safety lock** (24 different locks)

with 2 keys

**with enhanced contact protection / shutter (Safety Plus)**

with screwless terminals for rigid and untreated flexible wires up to 2.5 mm<sup>2</sup>

without claws: ref.-no. with additional "N", e.g.: ..1520 N..

Supporting frame, claws and claw screws are integrated into the earth protection.


**Spare part:**

Transparent cover with paper inlay ref.-no.: LS 90 NA


**Spare key** ref.-no.: 802 SL to 825 SL (When ordering, please indicate lock number, e.g. 813 SL)

Inscription fields may be customised using our GRAPHIC TOOL ([jung.group/gt](http://jung.group/gt)).

Dimensions

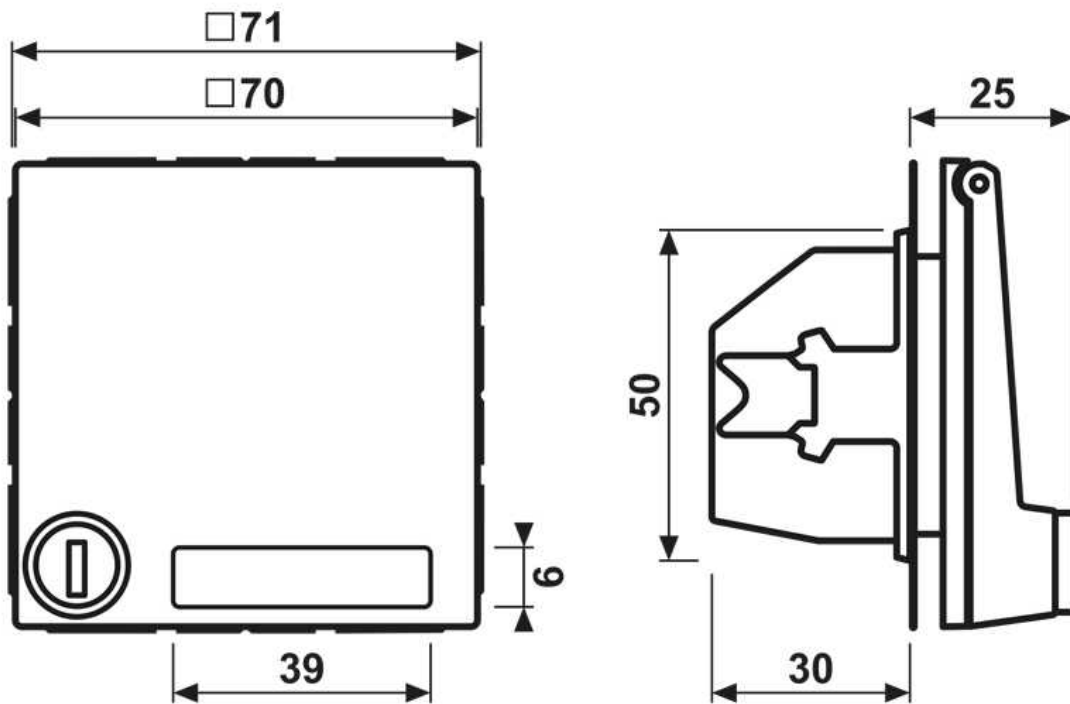

## Assembly

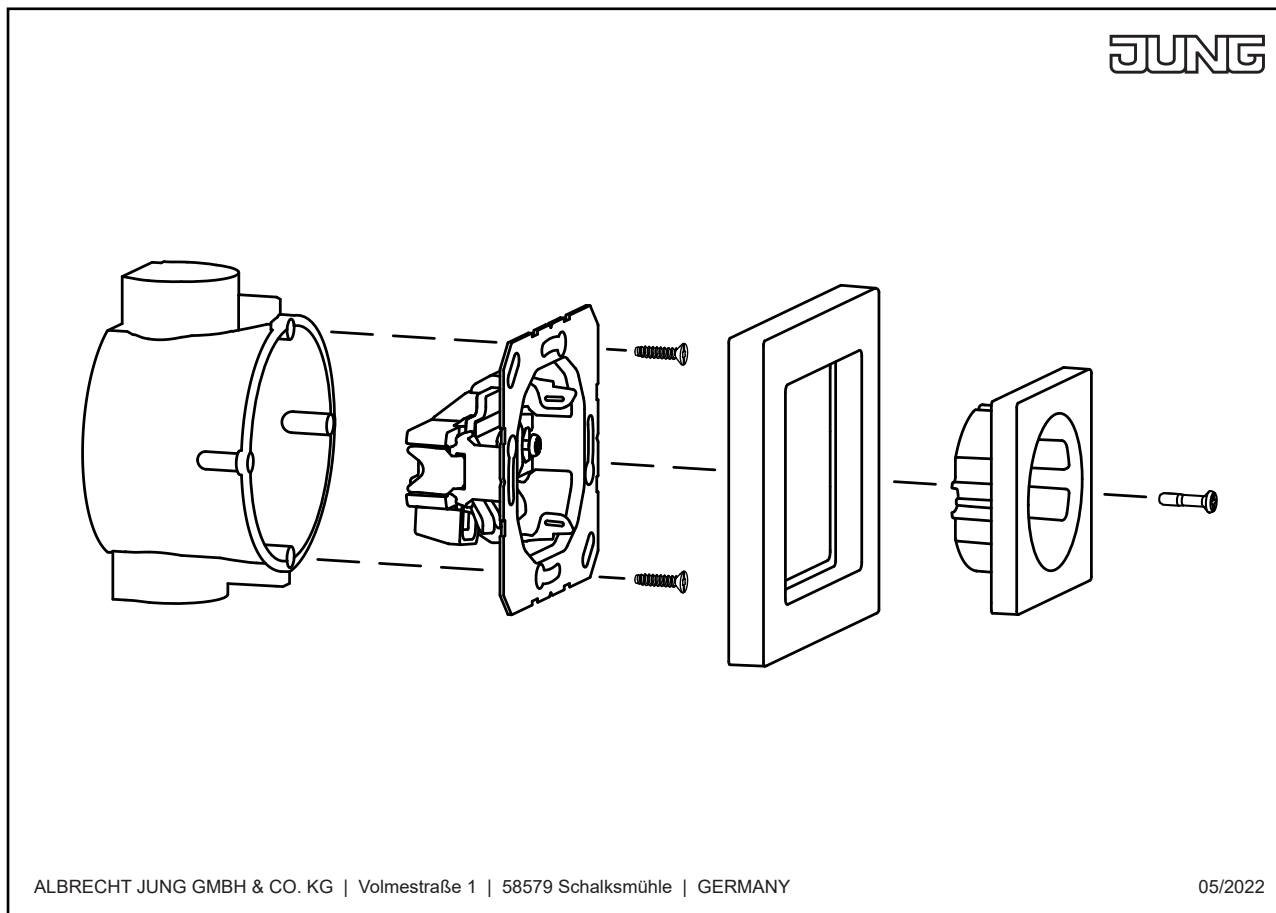**Notice!**

**Installation only by persons with relevant electrical knowledge and experience!\*)**

**Use only with original JUNG product components approved for this article.**

By inappropriate installation you endanger

- your own life,
- the life of the user of the electrical appliance.

By inappropriate installation you risk a high loss by damage, e.g. risk by fire.

You assume personal liability in cause of injury to persons or damage of appliances.

**Please contact a skilled electrician!**

**\*) Required technical knowledge for installation:**

For installation, especially the following technical knowledge is required:

- the 5 important safety rules: disconnect from mains, secure against reconnecting, verify parts are free of voltage, ground and short-circuit, cover or block off adjacent live parts
- select adequate tools, measuring devices and personal protective equipment
- evaluate measuring results
- selection of the electrical installation material to secure switch-off conditions
- IP protection levels
- installation of the electrical installation material
- type of electric power grid (TN system, IT system, TT system) and the resultant connection terms (common grounding, protective ground, required additional action etc.)