



CWT70H50...NMC Support Channel

3.0 Sheet thickness 3.0 mm

Information

Usage

Load-bearing system element - vertical support posts for free-standing systems

Material



S350GD steel in:

Magnelis®, MagiZinc®, PosMAC coating

Additional information

- increased tolerance of depth of insertion of support posts into the ground and easier levelling of panels due to extension of holes to 35 mm
- better blocking of the SGKFM10x20PV locking screws (with mushroom heads) due to the change of the oval holes into rectangular
- enlarged and condensed perforation matched to the BDFCH profiles, so as to enable installation of system within the range of 20-35 degrees of inclination of the panels in relation to the ground
- made of Magnelis®-coated material with very high corrosion resistance
- possibility to make solid channels with perforation only in screwed points

For the assembly use SGKFM10x20PV Screw Sets

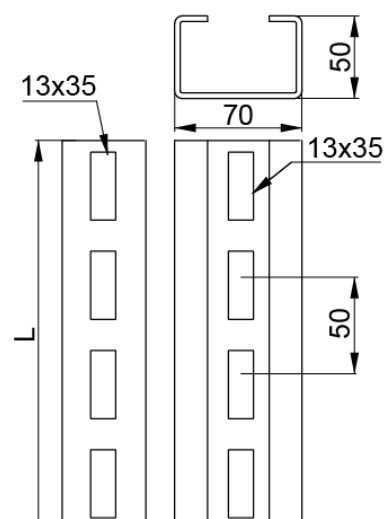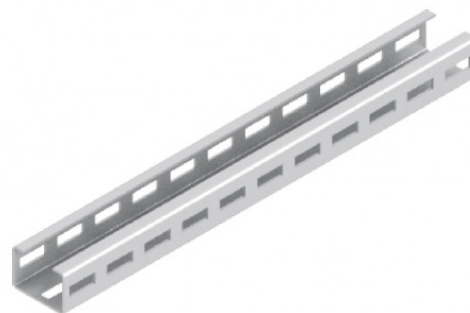



Product versions

Symbol	Catalogue number	Length L (mm)	Weight 1 pc. (kg)	Quantity (pcs.)
CWT70H50/1NMC	867810	1,020	3.76	4
CWT70H50/2NMC	867820	1,989	7.52	4
CWT70H50/2,4NMC	867824	2,397	9.02	4
CWT70H50/3NMC	867830	3,009	11.28	4
CWT70H50/3,2NMC	867832	3,213	12.03	4
CWT70H50/3,4NMC	867834	3,413	12.78	4
CWT70H50/4,4NMC	867844	4,386	16.54	4

Examples

