



KDS/KDSO...H60 Wire Mesh Cable Tray

0.0 Sheet thickness 0.0 mm

E90 E-90 system

Information

Usage






Cable routing.

Material

G - galvanised Available finishes: F - hot dip galvanised steel PN-EN ISO 1461:2023-02 E - stainless steel L - painting in standard RAL colour

Additional information

All wire mesh cable trays has smooth cutted wire ends to prevent cable damage

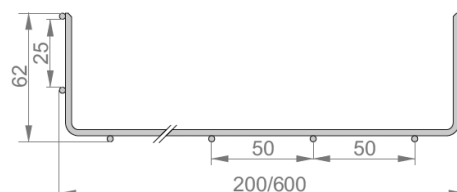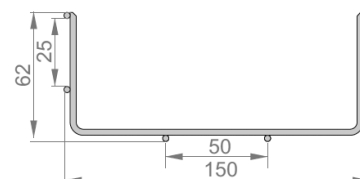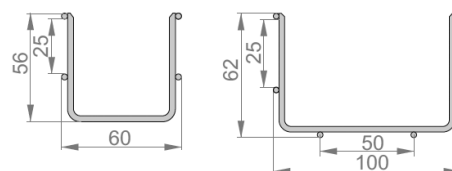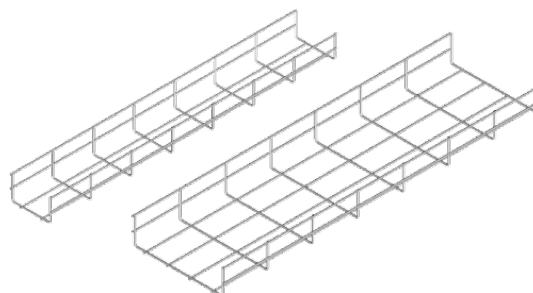




Product versions

Symbol	Catalogue number	Width a (mm)	Length L (mm)	Średnica drutu (mm)	Weight (1m) (kg)	Quantity in box (m.) (szt. / m. b.)	Effective section
KDS/KDSO60H60/3	970106	60	3,000	3.80	0.51	8 / 24	2,200
KDS/KDSO100H60/3	970110	100	3,000	3.80	0.73	8 / 24	4,300
KDS/KDSO150H60/3	970115	150	3,000	3.80	0.78	8 / 24	7,000
KDS/KDSO200H60/3	970120	200	3,000	3.80	1	4 / 12	9,400
KDS/KDSO300H60/3	970130	300	3,000	4.50	1.76	4 / 12	14,600
KDS/KDSO400H60/3	970140	400	3,000	4.50	2.14	2 / 6	19,800
KDS/KDSO500H60/3	970150	500	3,000	5	3.09	2 / 6	25,000
KDS/KDSO600H60/3	970160	600	3,000	5	3.56	2 / 6	30,200

Load

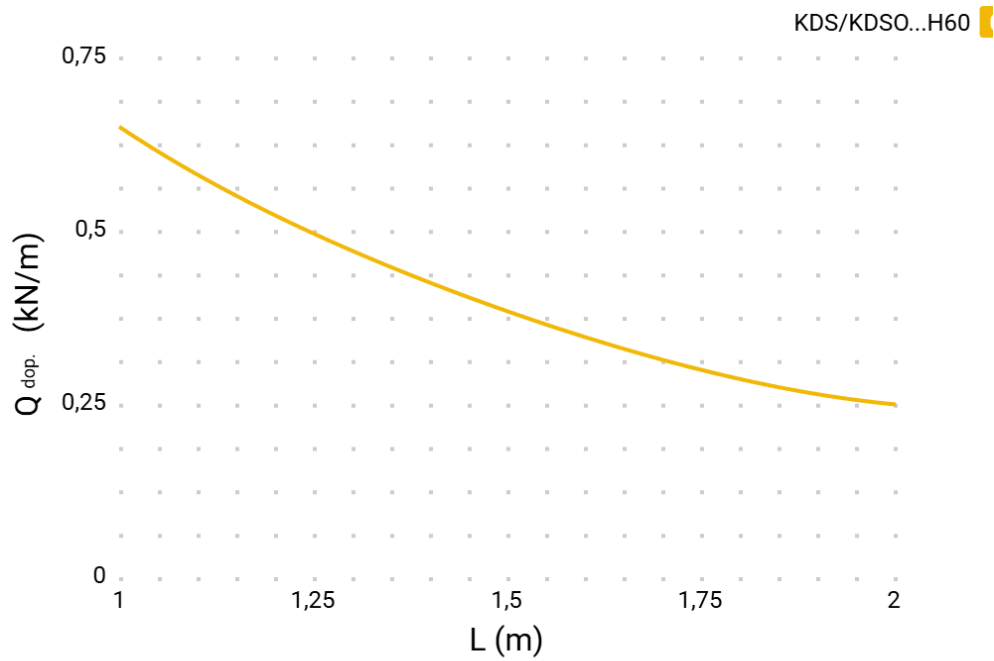

Examples

