



KGR...H30 Cable Tray

0.5 Sheet thickness 0.5 mm

Information

Usage

Cable routing

Material



S - Sendzimir method galvanised steel PN-EN 10346:2015-09



Available finishes: F - hot dip galvanised steel PN-EN ISO 1461:2023-

02 L - painting in standard RAL colour

Additional information

* - Versions over 300 m available on request Possibility of joining cable tray sections together through sliding one into another and connector-free assembly. For the assembly use Screw Sets SGKM6x10 or SGM6x10.

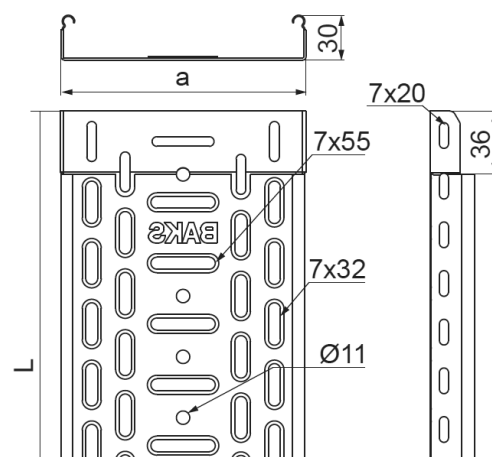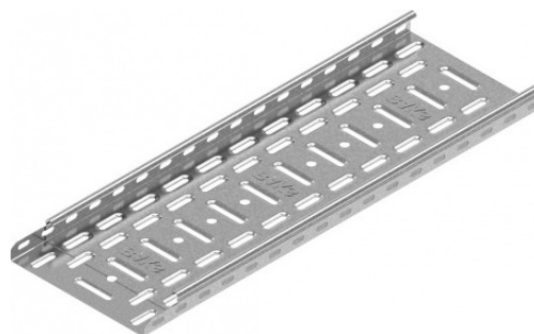

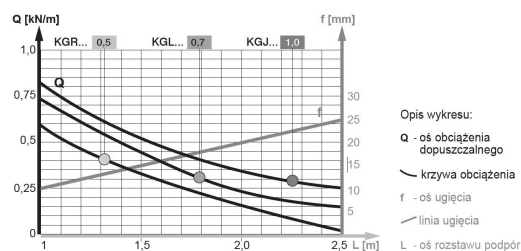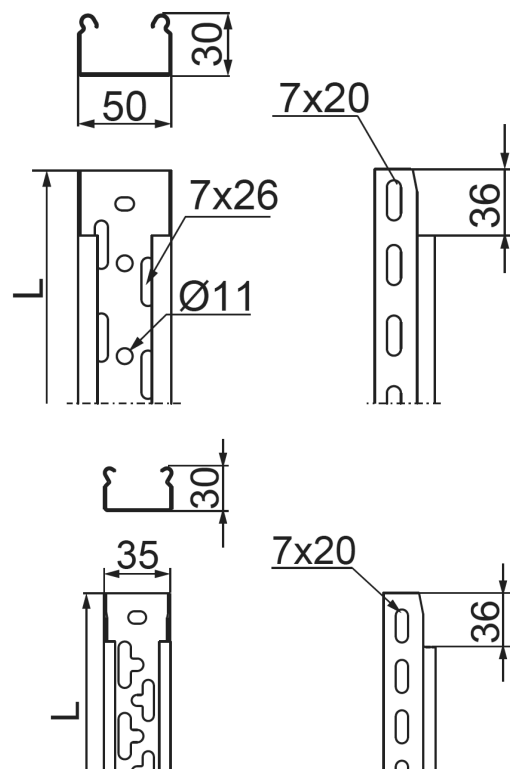

Product versions

Symbol	Catalogue number	Width a (mm)	Length L (mm)	Weight (1m) (kg)	Quantity in box (m.) (szt. / m. b.)	Effective section
KGR35H30/2	130103	35	2,000	0.39	4 / 8	850
KGR35H30/3	130203	35	3,000	0.39	4 / 12	850
KGR50H30/3	130205	50	3,000	0.43	4 / 12	1,300
KGR100H30/3	130916	100	3,000	0.62	4 / 12	2,800
KGR150H30/3	131016	150	3,000	0.86	4 / 12	4,300
KGR200H30/3	131116	200	3,000	0.99	4 / 12	5,800



Load

