



KGJ...H42 Cable Tray

1.0 Sheet thickness 1.0 mm

Information

Usage

Cable routing



Material


S - Sendzimir method galvanised steel PN-EN 10346:2015-09

Available finishes: F - hot dip galvanised steel PN-EN ISO 1461:2023-02 L - painting in standard RAL colour

Additional information

Possibility of joining cable tray sections together through sliding one into another and connector-free assembly. For the assembly use Screw Sets SGKM6x10 or SGM6x10

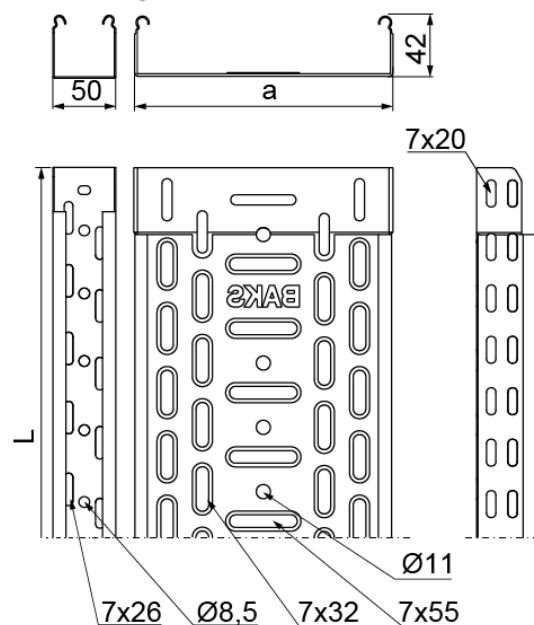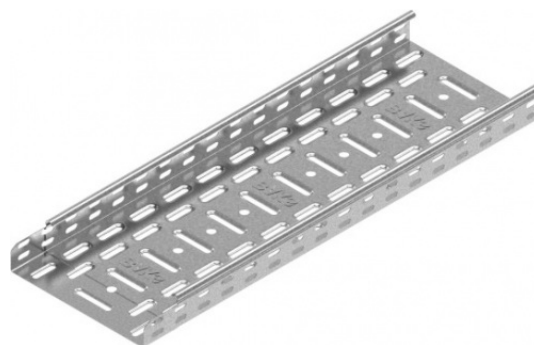

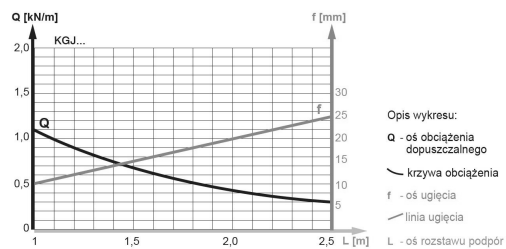

Product versions

Symbol	Catalogue number	Width a (mm)	Length L (mm)	Weight (1m) (kg)	Quantity in box (m.) (szt. / m. b.)	Effective section
KGJ/KCJ50H42/2	140505	50	2,000	0.99	4 / 8	1,900
KGJ/KCJ50H42/3	140605	50	3,000	0.99	4 / 12	1,900
KGJ100H42/3	140816	100	3,000	1.30	4 / 12	4,000
KGJ200H42/3	141016	200	3,000	1.87	4 / 12	8,200
KGJ300H42/3	141116	300	3,000	2.52	4 / 12	12,400
KGJ400H42/3	141216	400	3,000	3.17	2 / 6	16,600

Load

