



KFJ...H60 Cable Tray

1.0 Sheet thickness 1.0 mm

N New product **E90** E-90 system **Ⓢ** fast assembly **⊗** Installation without tools

Information

Usage

Cable routing

Material

S - Sendzimir method galvanised steel PN-EN 10346:2015-09


Available finishes: L - painting in standard RAL colour

Additional information

Advantages of new system:

- Fast and easy assembly
- Firm click connection
- Deep stamping around the slots in the bottom increase the strength
- Dense perforation with stamping around the slots for excellent heat transfer – designed to enable cable tray installation on supports from BAKS anywhere within the system

Slotted holes $\varnothing 11$ in the cable tray bottom allow for suspension on a threaded rod

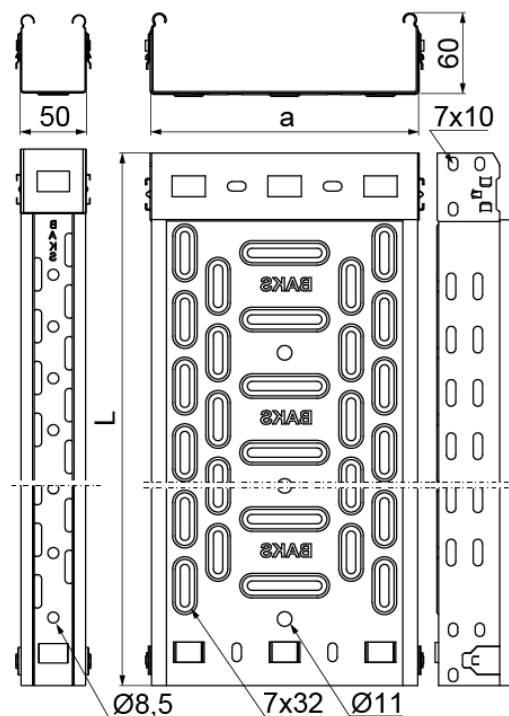




Product versions

Symbol	Catalogue number	Width a (mm)	Length L (mm)	Weight (1m) (kg)	Quantity in box (m.) (szt. / m. b.)	Effective section
KFJ100H60/3	162623	100	3,000	1.53	4 / 12	5,800
KFJ150H60/3	162723	150	3,000	1.86	4 / 12	8,800
KFJ200H60/3	162823	200	3,000	2.13	4 / 12	11,800
KFJ300H60/3	162923	300	3,000	2.76	4 / 12	17,800
KFJ400H60/3	163023	400	3,000	3.37	2 / 6	23,800

Load

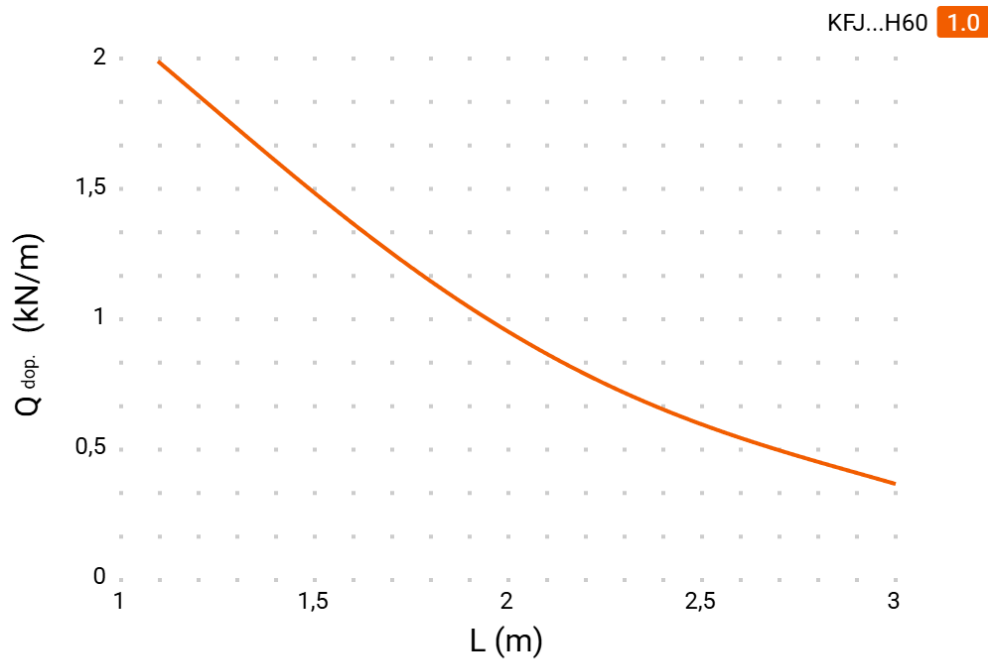

Examples

