



PSB Head Plate

0.0 Sheet thickness 0.0 mm


N New product  Product designed for heavy load

Information

Usage
Suspending cable routes based on double channels.

Material
FP - galvanised according to the zinc flake method PN-EN ISO 10683:2018-11 Available finishes: E - stainless steel L - painting in standard RAL colour

Additional information
– fits CMPC41H42 and CMPM41H42 channels (slide-in) – additional element for the system – extra durable base for the new 41H42 double channels – special design protects the channel from deformation and reduces mounting time – mounting of the wall brackets to the open side of the channel, possibility of stepless adjustment

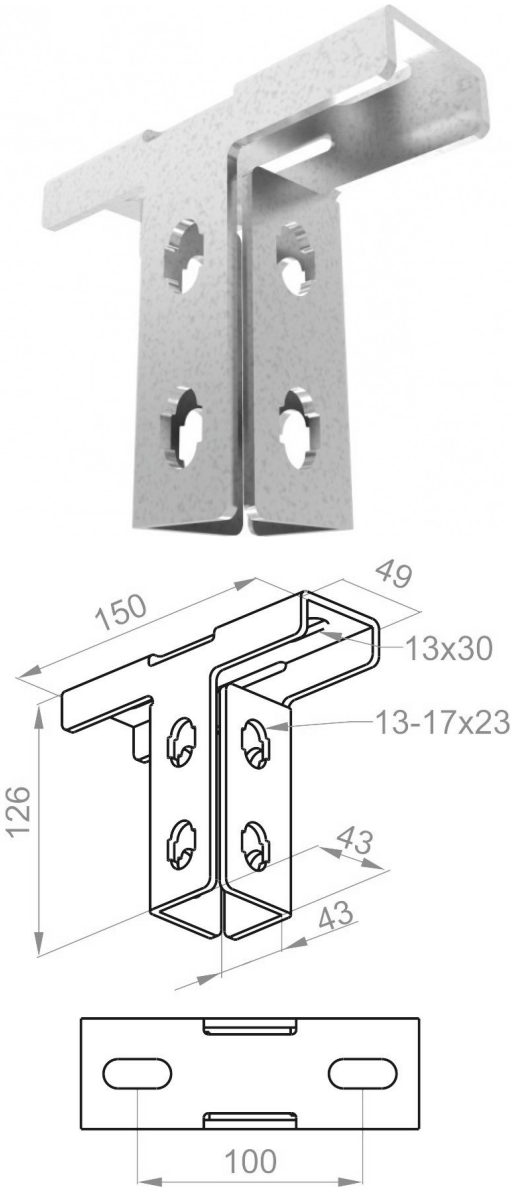

Product versions

Symbol	Catalogue number	Weight 1 pc. (kg)	Quantity (pcs.)
PSB	714123	0.78	10



Examples

Jednostronne obciążenie wspornika						
	Dł. wysięgnika w mm	100	200	300	400	500 600
	Obciążenie maksymalne "F" całkow. w [kN]	1,90	1,70	1,30	1,10	1,00 0,90
Obustronne obciążenie wspornika						
	Dł. wysięgnika w mm	100	200	300	400	500 600
	Obciążenie maksymalne "F" całkow. w [kN]	2,80	2,50	2,20	2,00	1,80 1,60

Obciążenie maksymalne "F" całkow. = ciężar kabla + koryto + wspornik + wysięgnik bez ciężaru pracownika. Przy obciążeniu obustronnym różnica sił po obu stronach wspornika nie może przekraczać 50% max. obciążenia.

