


ShellBox

IPX8 gel-insulated connection device with SpringBox lever connectors



Water and weather protection thanks to the gel, which provides an **IPX8 rating** in an even more compact device, thanks to the use of **SpringBox connectors**

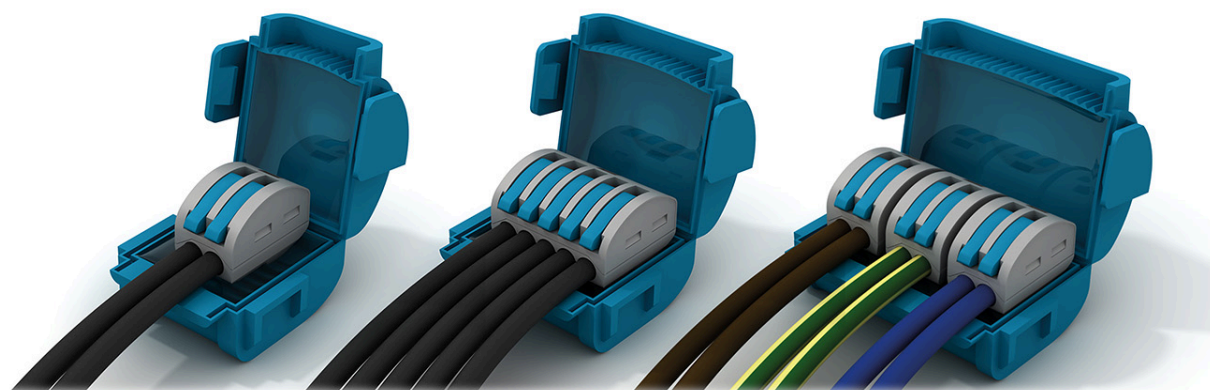


APPLICATIONS

- Connecting, insulating, and protecting, even in the presence of water, electrical connections of small cables (lighting fixtures, window, door, and gate automation, telephone and telecommunication systems, audio and wire broadcasting systems)
- Construction of flying junction boxes on suspended ceilings or outdoors
- Terminal insulation of live wires



BENEFITS


- Total protection from water, dust, debris and atmospheric agents
- ~~Flexible and fractureable bulkheads: fit over the cables and ensure that gel escapes only where~~

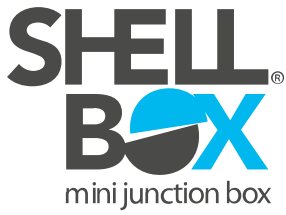

ShellBox

IPX8 gel-insulated connection device with SpringBox lever connectors

- Plastic polymer hard case with snap closure, prefilled with gel
- **Insulated connectors with SpringBox lever clamps**

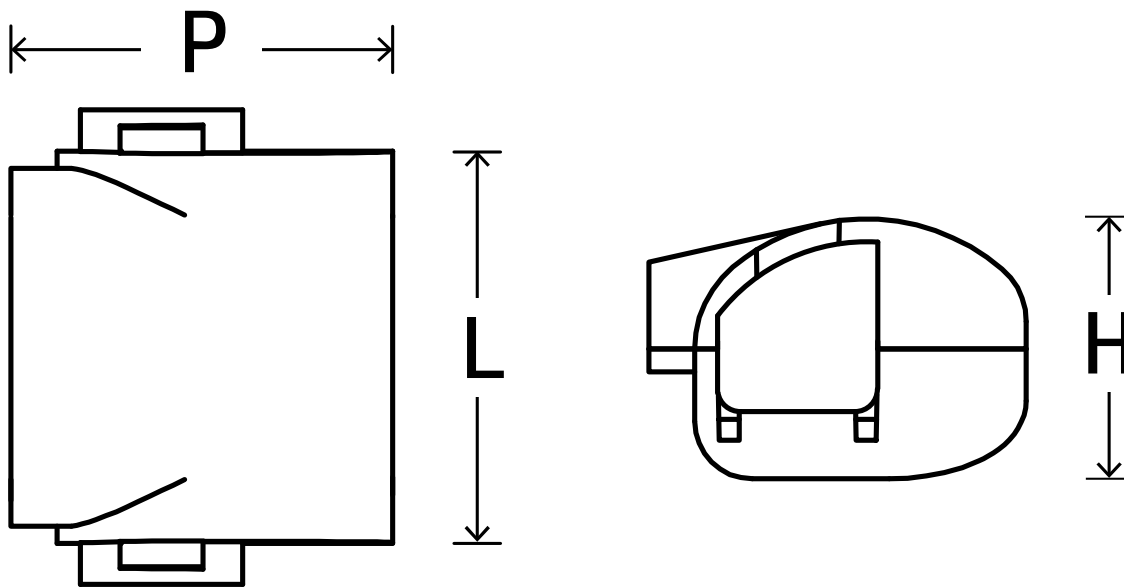

size	dimensions (mm) L x W x H
size 1	26 x 33 x 23
size 2	34 x 33 x 23
size 3	46 x 33 x 23



Complies with Standard
for low voltage 0.6/1 kV joints
EN 50393

Product description




ShellBox

IPX8 gel-insulated
connection device with SpringBox lever
connectors

Conductor cross-section
(rigid and flexible)
0.2 - 4 mm²
(24-12 AWG)



CE Marking



Double insulation



Degree of protection



Simplified installation



Reaccessible



Without
expiration



2011/65/EU



Non-toxic



Eco-friendly

▼ Shell Box





ShellBox

IPX8 gel-insulated connection device with SpringBox lever connectors

12-shellbox/)


13-shellbox/)

15-shellbox/)

Read (https://www.etelec.com/en/more_product/mjb112-shellbox/)

Read (https://www.etelec.com/en/more_product/mjb113-shellbox/)


Read (https://www.etelec.com/en/more_product/mjb215-shellbox/)

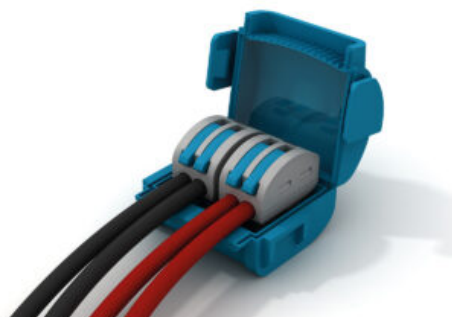

ShellBox 222

(<https://www.etelec.com/en/product/mjb222-shellbox/>)

Read (https://www.etelec.com/en/more_product/mjb222-shellbox/)

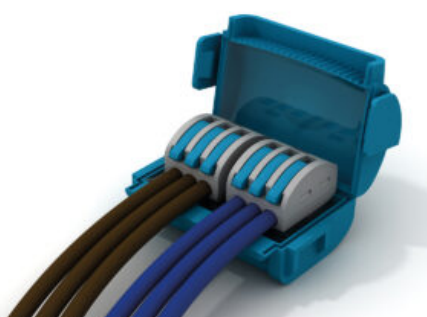

ShellBox 323

(<https://www.etelec.com/en/product/mjb23-shellbox/>)

Read (https://www.etelec.com/en/more_product/mjb323-shellbox/)



ShellBox 332

(<https://www.etelec.com/en/product/mjb332-shellbox/>)

Read (https://www.etelec.com/en/more_product/mjb332-shellbox/)



Note sulla certificazione

- Privacy Policy
- Cookie Policy
- Quality & Environment Policy
- European Regional Development Fund - Industry 4.0

- Modello Organizzazione e Gestione
- Whistleblowing Portal

PIVA: IT06507481213 | Capitale sociale: 5.000.000,00 € i.v.



Etelec Italia S.p.A. Società Benefit
via D. de Roberto, 40 80143 NA Italia

Ph.: +39 081 5846610 - 081 5848659

PEC: etelecitalia@pec.it

IPX8 gel-insulated
connection device with SpringBox lever
connectors

Società soggetta all'attività di direzione e coordinamento da parte della ETELEC GROUP S.R.L.

© 2026 Etelec Italia S.p.A. Energia Connessa

