

# Product data sheet

Specifications



## TeSys Deca Manual Starter and Protector, auxiliary contact block, 1 NO and 1 NC, top mount, screw clamp

GVAE11

Product availability: Stock - Normally stocked in distribution facility

### Main

Range	TeSys TeSys Deca
Device short name	GVAE
Product or Component Type	Auxiliary contact block
Product Compatibility	GV2P GV2L GV2ME GV2LE GV2RT GV2LM GV3P GV3L
Mounting Location	Front side
Pole contact composition	1 NO + 1 NC
Quantity per Set	Set of 10

### Complementary

[Ui] rated insulation voltage	300 V UL 508 300 V CSA C22.2 No 14 250 V IEC 60947-1
[Ue] rated operational voltage	24...240 V AC 24...60 V DC
[Ith] conventional free air thermal current	2.5 A
Mechanical durability	100000 cycles
Minimum switching current	5 mA
Minimum switching voltage	17 V
Protection type	GG fuse 10 A GB2CB06 circuit breaker 10 A maximum
Rated operational power in VA	120 VA 110...120 V AC-15 100000 cycles 120 VA 230...240 V AC-15 100000 cycles 48 VA 24 V AC-15 100000 cycles 60 VA 48 V AC-15 100000 cycles
Rated operational power in W	15 W 48 V DC-13 100000 cycles 24 W 24 V DC-13 100000 cycles 9 W 60 V DC-13 100000 cycles
Tightening torque	15.05 lbf.in (1.7 N.m) screw clamp terminals
Height	0.4 in (11 mm)
Width	1.8 in (45 mm)
Depth	1.1 in (29 mm)

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

<b>Product Weight</b>	0.04 lb(US) (0.02 kg)
<b>color</b>	Dark grey

## Environment

<b>Environmental characteristic</b>	Normal environment
<b>Standards</b>	EN/IEC 60947-5-1 UL 60947-4-1 CSA C22.2 No 60947-4-1 IEC/EN 60335-1:Clause 30.2 IEC/EN 60335-2-40:Annex JJ
<b>Product Certifications</b>	CB Scheme CE UKCA CCC cULus EAC

## Ordering and shipping details

<b>Category</b>	US10I1122367
<b>Discount Schedule</b>	0I11
<b>GTIN</b>	3389110343434
<b>Returnability</b>	Yes
<b>Country of origin</b>	CZ

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Nbr. of units in pkg.</b>	1
<b>Package 1 Height</b>	0.394 in (1.000 cm)
<b>Package 1 Width</b>	3.150 in (8.000 cm)
<b>Package 1 Length</b>	3.543 in (9.000 cm)
<b>Package weight(Lbs)</b>	0.600 oz (17.000 g)
<b>Unit Type of Package 2</b>	BB1
<b>Number of Units in Package 2</b>	10
<b>Package 2 Height</b>	1.181 in (3.000 cm)
<b>Package 2 Width</b>	7.953 in (20.200 cm)
<b>Package 2 Length</b>	10.236 in (26.000 cm)
<b>Package 2 Weight</b>	6.138 oz (174.000 g)
<b>Unit Type of Package 3</b>	S03
<b>Number of Units in Package 3</b>	260
<b>Package 3 Height</b>	11.811 in (30.000 cm)
<b>Package 3 Width</b>	11.811 in (30.000 cm)
<b>Package 3 Length</b>	15.748 in (40.000 cm)
<b>Package 3 Weight</b>	10.946 lb(US) (4.965 kg)

## Contractual warranty

<b>Warranty (in months)</b>	18
-----------------------------	----



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



### Environmental footprint

Total lifecycle Carbon footprint	0.2 kg CO2 eq.
Carbon footprint of the manufacturing phase [A1 to A3]	0.1 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	0 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	0 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	0 kg CO2 eq.
Environmental Disclosure	<a href="#">Product Environmental Profile</a>

## Use Better



### Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
EU RoHS Directive	<a href="#">Compliant</a>
REACH Regulation	<a href="#">Free of Substances of Very High Concern above the threshold</a>
California proposition 65	<b>WARNING:</b> This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>

## Use Longer




### Lifetime extension

Repair	No
--------	----

## Use Again



### Repack and remanufacture

Recyclability potential, in %	42
Circularity Profile	<a href="#">End of Life Information</a>
Take-back	No
WEEE Label	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Connections and Schema

---

GVAE11

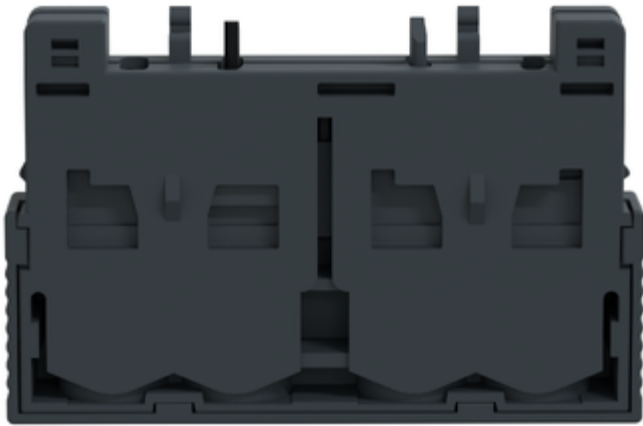


Image of product / Alternate images

Alternative

---





Technical Illustration

Assembly's dimensions

---

